







TF260 /S series


Typical Applications:

- Toys and Models
- Motorized Toys

DIRECTION OF ROTATION

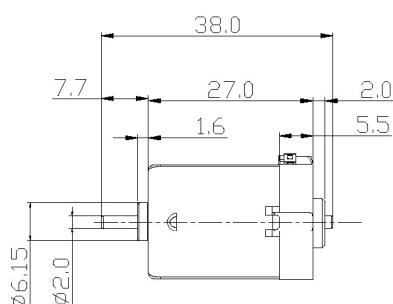

UNIT:MILLIMETRES

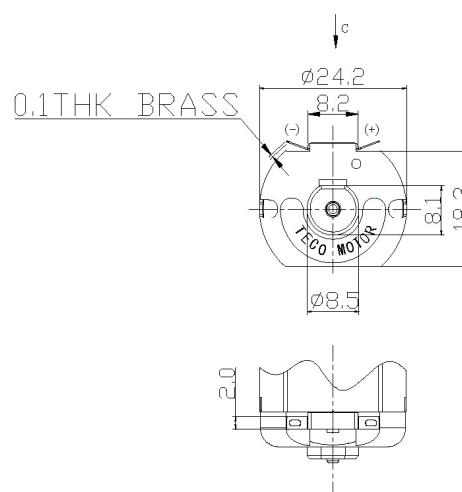

WEIGHT: 28g (APPROX)

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL		
	OPERATION RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		TORQUE		CURRENT
			rpm	A	rpm	A	mN-m	g-cm	mN-m	g-cm	A
TF260-20130	1.5~6.0V	3.0V CONSTANT	7300	0.100	5930	0.420	1.27	13.0	6.17	63	1.75
TF260-2867	1.5~3.0V	3.0V CONSTANT	13500	0.280	11500	1.200	1.81	18.5	9.80	100	5.50
TF260S-2672	1.5~6.0V	6.0V CONSTANT	18500	0.240	16000	1.480	2.94	30.0	20.58	210	9.20
TF260S-3240	1.5~3.0V	3.0V CONSTANT	16400	0.480	13300	2.100	2.58	26.3	13.23	135	8.80