

TR1230 /C series


Typical Applications: Toys and Models
 - Motorized Toys
 - Radio Control Model



DIRECTION OF ROTATION



UNIT:MILLIMETRES

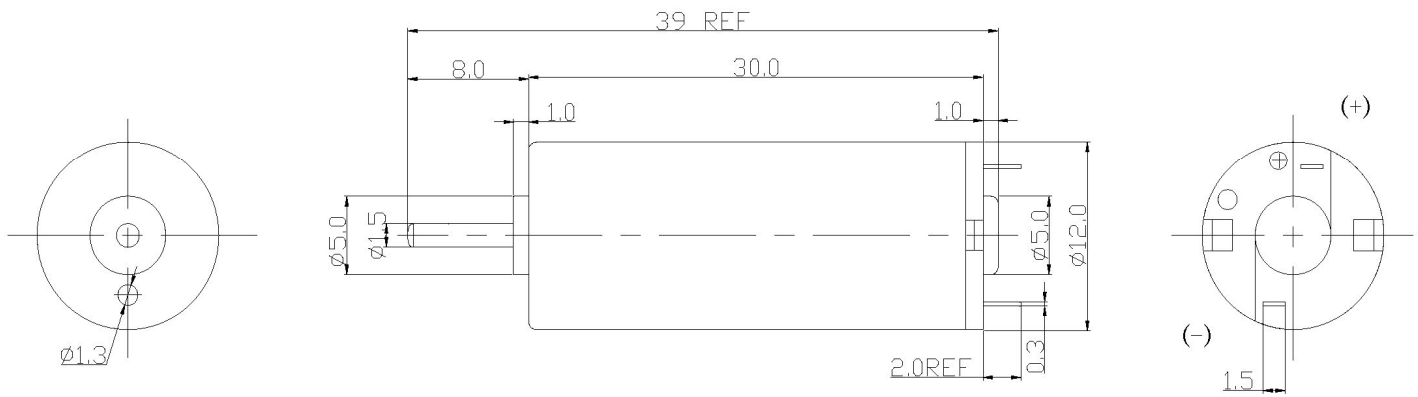

WEIGHT: 13g (APPROX)

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL		
	OPERATION RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		TORQUE	CURRENT	
			rpm	A			mN-m	g-cm			mN-m
TR1230-1748	1.5~3.0V	3.0V CONSTANT	18500	0.133	14800	0.530	0.59	6.0	2.94	30	2.12
TR1230-1950	1.5~3.0V	3.0V CONSTANT	18000	0.154	14400	0.611	0.63	6.4	3.14	32	2.44
TR1230C-10200	6.0~12.0V	12V CONSTANT	14500	0.060	11400	0.222	1.22	12.4	5.68	58	0.82
TR1230C-07295	6.0~12.0V	12V CONSTANT	12000	0.022	9440	0.081	0.52	5.3	2.45	25	0.30