




RF330 /C series

Typical Applications: Auto and Visual Equipments
- CD Player

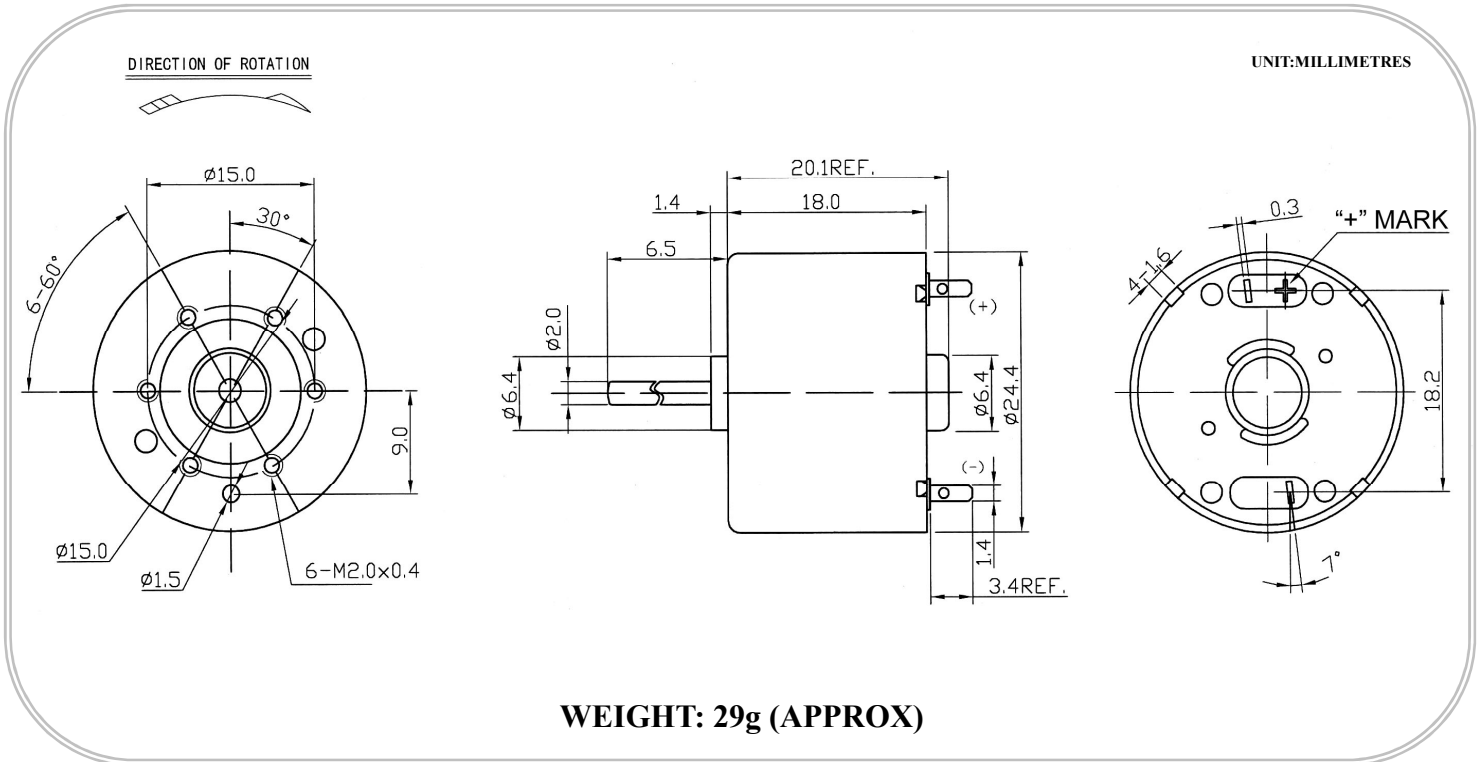

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL		
	OPERATION RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		TORQUE		CURRENT
			rpm	A	rpm	A	mN-m	g-cm	mN-m	g-cm	A
RF330-11440	3.0~6.0V	6.0V CONSTANT	5500	0.018	4580	0.092	0.71	7.2	4.21	43	0.46Max
RF330-11345	3.0~6.0V	3.0V CONSTANT	3050	0.023	2360	0.079	0.49	5.0	2.16	22	0.27Max
RF330-07800	3.0~6.0V	3.0V CONSTANT	1250	0.006	925	0.017	0.25	2.6	0.98	10	0.05 Max
RF300C-17155	1.5~4.5V	4.5V CONSTANT	10000	0.17	7860	0.620	1.48	15.1	6.96	71	2.28 Max