




## TR280C /SC series

Typical Applications: Toys and Models / House Appliances  
 - Motorized Toys - Massager / Vibrator  
 - Radio Control Model

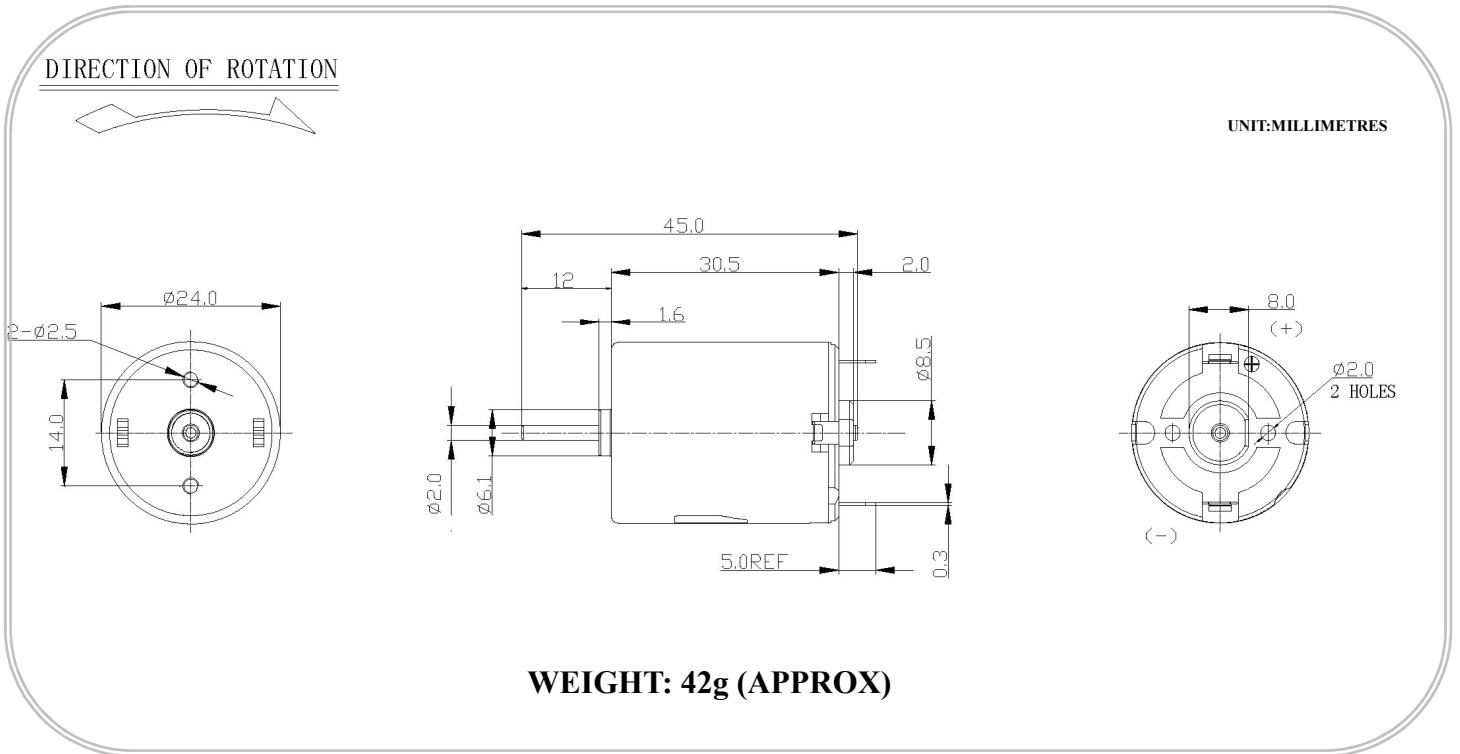

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL		
	OPERATION RANGE	NOMINAL	SPEED rpm	CURRENT A	SPEED rpm	CURRENT A	TORQUE		TORQUE		CURRENT A
							mN-m	g-cm	mN-m	g-cm	
TR280C-20130	3.0~9.0V	4.5V CONSTANT	7250	0.110	5850	0.460	2.06	21.0	10.58	108	1.90
		6.0V CONSTANT	9900	0.120	8250	0.540	2.38	24.3	13.72	140	2.82
TR280C-14210	4.5~12V	12V CONSTANT	12000	0.065	10080	0.315	2.32	23.7	14.21	145	1.65
TR280SC-07600	6.0~24V	12V CONSTANT	3000	0.014	2320	0.310	1.27	13.0	5.49	56	0.16
TR280SC-12280	4.5~12V	12V CONSTANT	6500	0.042	5415	0.200	2.60	26.5	14.70	150	0.95
TR280SC-2392	3.0~12V	9.6V CONSTANT	17300	0.200	15050	1.260	4.98	50.8	35.28	360	7.80